

Manufacturer: Door Worx

Door Slab Specifics:

- Please note that the “beauty shot” of the door is only to highlight the door’s features and may show the door finished, styled, with upgraded glass or other add-ons. This note that this door slab will come per the specifications listed for the door.
 - Door slabs come as “blanks” to the size indicated with no holes bored, hinge preps, handles or hardware unless otherwise noted.
 - Doors are only bored and prepped during install or the pre-hanging process.
 - The door is described as being raw wood, primed or pre-finished. Raw wood and primed doors will require a finish, please see finishing options tab for further information.
 - Door sizes are stated in industry standard nomenclature. For example, a fiberglass door slab measuring true 35 ¾” will be referred to as 36”. If you are buying a pre-hung unit, this will not necessarily affect your installation. However, if you are buying a door slab to replace a door slab, this will impact your installation. Please reach out to our staff to clarify the exact door measurements or confer with your installer.
-

Estimated delivery time:

- In Stock Now – Available for immediate pickup from Meade’s Tucker warehouse location
- All other orders are available in approximately 4-6 wks
- Add 2 weeks for pre-hang options
- Add 2 weeks for staining options
- Add 1 weeks for installation

* Please note that delivery times are still severely affected by the global crisis. Please contact customer service if you have any questions or concerns about your timeline. We still recommend that if a customer has a “drop dead must have date”, they order an in-stock door.

Warranties:

Door Worx warranties its products against manufacturing defects for a period of one year from date of shipment to the retailer. It is the responsibility of the customer, contractor, installer, & finisher to follow these requirements to validate your warranty. See link to full warranty.

* For a wood door it is CRITICAL that you finish and seal your door immediately to validate your warranty. You can hire Meade’s to do this or GlassCraft finishing specifics are outlined in their warranty.

* We do NOT recommend putting a storm door over any door. In most cases, this invalidates the warranty because it causes an excess of moisture and heat buildup and might cause the door to split or warp.

You can read our Door Worx Warranty in the FAQ Section.

Exterior Pre-hung Specifications:

By selecting the pre-hanging option, you will receive a door hinged, prepped for handle and assembled in a frame (also called the door “jamb”).

Each pre-hung door unit is weathertight and includes:

- 4-9/16" wide jambs
- Adjustable Aluminum door sill (threshold) in Bronze
- Door sweep
- Weatherstripping
- 3 Oil Rubbed Bronze hinges on doors less than 84" tall and 4 ORB Hinges on doors greater than 84" tall
- Exterior brickmould
- Mull posts (where applicable)
- T-astragal (for double doors)
- Pre-drilled door for handle and deadbolt (on active door for doubles)
 - We will pre-drill the door for a handle with 2-3/8"
 - Bore diameter: 2-1/8"
 - Deadbolt is drilled 5-1/2" above the handle center to center
- Double door units include T-astragal and a pair of flush bolts installed on the secondary (passive) door
- Note: Jamb will not be prepped for strike plates or bored for plungers. This will need to be done on site by installer.

Some quick guidelines on how to measure:

BEST: Rough Opening: Video: [How do I measure a rough opening?](#) located in our FAQ page

BETTER: Outside of Jamb to Outside of Jamb or Frame of Door: Video: [How do I measure the frame of my door?](#) Located in our FAQ page.

GOOD: Inside of Jamb to Inside of Jamb: Video: [How do I measure inside jamb to inside jamb?](#) Located in our FAQ page.

GOOD: Brickmould to Brickmould: Video: [How do I measure brickmould to brickmould?](#) Located in our FAQ page.

Jamb Width: Video: [How do I measure my jamb width?](#) Located in our FAQ page.

Please review the below reference chart to determine the size of exterior door you need.

Door Nomenclature	Slab	ISJ to ISJ	OSJ to OSJ	BM to BM	Rough Opening	Meade's Measure
		Preferred	Good	Preferred	Better	Best
Widths						
2/6	30"	29.25	31.75	34.25	32.25	We come to your home and GUARANTEE to build your door to FIT.
2/8	32"	31.25	33.75	36.25	34.25	
3/0	36"	35.25	37.75	40.25	38.25	
5/0 Double French Door	30"	59.75	62.25	64.75	62.75	
5/0 Double French door retro fit to replace 10" sidelite	29.5"	58.00	60.50	63.00	61.00	
5/4 Double French Door	32"	63.75	66.25	68.75	66.75	
6/0 Double French Door	36"	71.75	74.25	76.75	74.75	
10" x 3/0 x 10"	10" + 36" + 10"	58.00	60.50	63.00	61.00	
1/0 x 3/0 x 1/0	12" + 36" + 12"	62.00	64.50	67.00	65.00	
Heights						
6/8	79"	80.25	81.50	82.75	82.00	
6/8 Outswing	79"	80.25	81.00	82.50	81.50	
7/0	84"	85.25	86.50	87.75	87.00	
7/0 Outswing	84"	80.25	86.00	87.50	86.50	
8/0	96"	97.25	98.50	99.75	99	
8/0 Outswing	96"	97.25	98.00	99.50	98.50	

Selecting A Door Handing Option:

DOOR HANDING / SWING CHART



Interior




Exterior

Left Hand Inswing



Interior

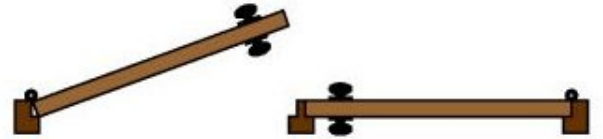

Exterior

Left Hand Inswing Double Door




Interior




Exterior

Right Hand Inswing



Interior

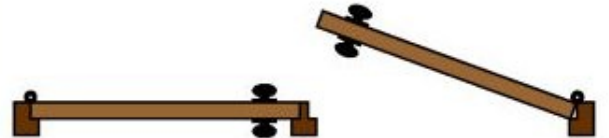

Exterior

Right Hand Inswing Double Door



Interior



Exterior

Right Hand Outswing



Interior



Exterior

Left Hand Outswing Double Door



Interior




Exterior

Left Hand Outswing



Interior

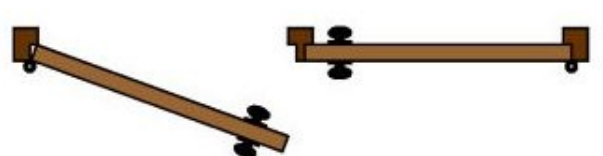

Exterior

Right Hand Outswing Double Door